

EXTENSÕES



Flexíveis, fáceis de enrolar,
de transportar e armazenar.

CABIDE

EXTENSÃO 2P



57501/010
57501/015
57501/020



57502/010
57502/015
57502/020
57502/030



57503/020

REF.	EMB.	789.1435.	DESCRIÇÃO	COR
cabide [2200W - 10A]				
57501/010	6	03148 5	10 m - Ø 1,0 mm	
57501/015	6	04203 0	15 m - Ø 1,0 mm	
57501/020*	6	03149 2	20 m - Ø 1,0 mm	
57502/010	6	04379 2	10 m - Ø 1,5 mm	
57502/015	6	04385 3	15 m - Ø 1,5 mm	
57502/020	6	04380 8	20 m - Ø 1,5 mm	
57502/030*	6	04381 5	30 m - Ø 1,5 mm	
57503/020	3	04384 6	20 m - Ø 2,5 mm	

Cabide em material termoplástico. Fornecido com cabo PP plano com plugue fêmea e angular 2P. Suporta 600W em 127V~ e 1200W em 220V~.

especificações técnicas das extensões

SEÇÃO TRANSVERSAL	COMPRIMENTO	TENSÃO	POTÊNCIA
1,0 mm ²	10 metros	127V~	1200 W
		220V~	2200 W
	15 metros	127V~	1200 W
		220V~	2200 W
	20 metros	127V~	600 W
		220V~	1200 W
1,5 mm ²	10 metros	127V~	1200 W
		220V~	2200 W
	15 metros	127V~	1200 W
		220V~	2200 W
	20 metros	127V~	1200 W
		220V~	2200 W
2,5 mm ²	20 metros	127V~	1200 W
		220V~	2200 W

TOMADAS MÚLTIPLAS



57504/062



57504/063




57504/064



REF.	EMB.	789.1435.	DESCRIÇÃO
tomadas múltiplas 2P+T*			
57504/062	20	05592 4	2 tomadas 2P+T 10A - 250V~
57504/063	20	05593 1	3 tomadas 2P+T 10A - 250V~
57504/064	20	05594 8	4 tomadas 2P+T 10A - 250V~

*Somente na cor branca.

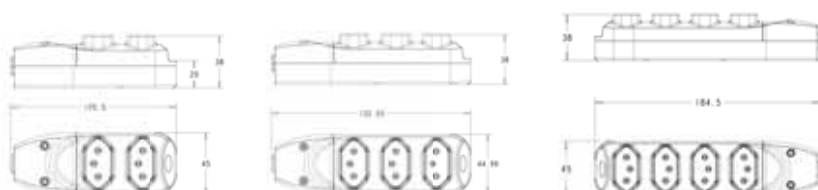

EXTENSÕES MÚLTIPLAS



57504/019



57504/020



57504/021



57504/029



57504/030



57504/031

REF.	DESCRIÇÃO	DIMENSÃO	EMB. 789.1435.
3 tomadas			
57504/019	extensão 3 tomadas 2P+T 10A 250V~	1,5 m	12 06093 5
57504/020	extensão 3 tomadas 2P+T 10A 250V~	3 m	12 05183 4
57504/021	extensão 3 tomadas 2P+T 10A 250V~	5 m	6 05184 1
5 tomadas			
57504/029	extensão 5 tomadas 2P+T 10A 250V~	1,5 m	12 06094 2
57504/030	extensão 5 tomadas 2P+T 10A 250V~	3 m	12 05185 8
57504/031	extensão 5 tomadas 2P+T 10A 250V~	5 m	6 05186 5